

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 27/00, 27/02, 27/26, B32B 5/22	A1	(11) International Publication Number: WO 99/53300 (43) International Publication Date: 21 October 1999 (21.10.99)
(21) International Application Number: PCT/US99/08263 (22) International Filing Date: 13 April 1999 (13.04.99) (30) Priority Data: 60/081,781 14 April 1998 (14.04.98) US (71) Applicant: CALIFORNIA INSTITUTE OF TECHNOLOGY [US/US]; 1200 East California Boulevard, Pasadena, CA 91125 (US). (72) Inventors: LEWIS, Nathan, S.; 5259 Gould Avenue, La Canada, CA 91011 (US). VAID, Thomas, P.; 169 N. Holliston Avenue #11, Pasadena, CA 91006 (US). (74) Agent: HARRIS, Scott, C.; Fish & Richardson P.C., Suite 1400, 4225 Executive Square, La Jolla, CA 92037 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: METHOD AND SYSTEM FOR DETERMINING ANALYTE ACTIVITY (57) Abstract Chemical sensors for detecting the activity of a molecule or analyte of interest is provided. The chemical sensors comprise an array or plurality of chemically-sensitive resistors that are capable of interacting with the molecule of interest, wherein the interaction provides a resistance fingerprint. The fingerprint can be associated with a library of similar molecules of interest to determine the molecule's activity.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LJ	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

- 1 -

METHOD AND SYSTEM FOR DETERMINING ANALYTE ACTIVITY

Field of the Invention

5 The present invention relates to a sensor apparatus useful in detecting trace analytes in a sample, and more specifically determining the analyte's biological or physical activity.

Background of the Invention

 There exists a need for determining a variety of molecular properties
10 that are important in determining a biological, a chemical, or a physical property or activity of a molecule and cataloging these properties so that they can be used to identify candidate lead molecules for a biological, chemical, pharmaceutical, or industrial application of interest.

 Currently methods are used to screen potential drug compounds or
15 biologics from a collection of molecules of interest (*e.g.*, a library). Such methods use assay techniques that detect a specific activity based on a molecule's binding affinity, enzymatic activity or other properties. Alternatively, lead compounds are generated by computational methods, wherein the molecules that possess certain desirable properties are defined by shape, dipole moments, surface area, solubility,
20 vapor pressure, hydrophobicity, hydrophilicity, antigenicity and other physical properties. These chemical-physical properties are then defined and used to computationally narrow lead compounds to a manageable subset which are then analyzed further by additional screening techniques designed to measure a specific activity *in vitro* or *in vivo* by using additional high throughput screening
25 techniques.

 Generation of lead compounds is important because not only does it allow for exploration of a wider range of potential pharmaceutical agents, but it

- 2 -

also offers opportunities for construction of follow-up libraries that focus on the molecular characteristics represented by these lead molecules. This in turn is performed to provide yet more leads with the desired pharmaceutical activity
5 eventually with the hope of finding a candidate suitable for clinical use.

Summary of the Invention

The present invention provides a method for identifying a specific activity, structure or function of a molecule of interest based on a sensing device. The sensing device includes an array of sensors responsive to a molecule's
10 physical, chemical, or biological characteristics. The differentially responsive sensors can be optical sensors, resonance mechanic frequency sensors, and/or electrical sensors to name a few. Other sensors and arrays are known to those of skill in the art. For example, in one embodiment the sensing device includes a chemical sensor comprising first and second conductive elements (*e.g.* electrical
15 leads) electrically coupled to a chemically sensitive resistor which provides a selective electrical path between the conductive elements. The resistor comprises a plurality of alternating non-conductive regions (comprising a non-conductive material) and conductive regions (comprising a conductive material) in series. The electrical path between the first and second conductive elements is transverse to
20 (*i.e.*, passes through) a plurality of alternating non-conductive and conductive regions. In use, the resistor provides a change in resistance between the conductive elements when contacted with an analyte or molecule which interacts with the non-conductive region. The non-conductive region can be made of any material
designed to interact or bind to a class, genus, or specie of analyte.

25 The disclosure provides a method and device for identifying a specific activity, structure or function of an analyte or molecule of interest. The method uses a sensing device to produce a characteristic experimental pattern generated by a plurality of differentially responsive sensors. The pattern has information on the desired molecular properties for a molecule or analyte of interest. A response
30 pattern is produced for each member of the library. These patterns are then stored

- 3 -

and associated with the library. The library contains patterns for molecules having a desired or known property or activity.

In one embodiment, a method is provided for screening samples for a
5 specific activity or structure by measuring outputs of a plurality of chemically-sensitive resistors, each resistor comprising a conductive material and a non-conductive material; using results of said measuring to obtain a signal profile, relating to a change in resistance in the plurality of resistors; and comparing the signal profile to a previously-obtained signal profile indicating a standard sample
10 having a specific activity, wherein the signal profile is indicative of a specific activity or a specific structure.

The disclosure additionally provides a screening system that includes a sensor array comprising a plurality of differentially responsive sensors, each sensor capable of providing a signal corresponding to the sensors interaction with a
15 molecule of interest. A measuring device detects the signal from each sensor and arranges them into a signal profile representing a molecule's characteristics (*e.g.*, activity, structure, or function). A computer then compares the signal profile to determine the molecule's activity. Preferably, the computer has a resident algorithm for comparing the signal profile(s).

20 For example, in one embodiment, a sample screening system is provided, the system including a sensor array comprising at least first and second chemically-sensitive resistors, each chemically-sensitive resistor comprising a mixture of non-conductive organic polymer and conductive material compositionally different than said non-conductive organic polymer, each resistor
25 providing an electrical path through said mixture of non-conductive organic polymer and said conductive material, a first electrical resistance, when contacted with a first chemical analyte at a first concentration and a second different electrical resistance when contacted with a second analyte, wherein the difference between the first electrical resistance and the second electrical resistance of the first
30 chemically-sensitive resistor being different from the difference between the first electrical resistance and the second electrical resistance of the second chemically-

- 4 -

sensitive resistor; an electrical measuring device electrically connected to the sensor array; and a computer wherein the electrical measuring device detects the first and second electrical resistance in each of the chemically-sensitive resistors and the
5 computer assembles the resistance into a sensor array signal profile, wherein the computer is operative to compare the signal profile to a signal profile obtained from a standard sample having a specific activity, wherein the signal profile is indicative of a specific activity or a specific structure.

10 Brief Description of the Drawing

These and other objects of the present invention will now be described in detail with reference to the accompanying drawing, in which:

Figure 1A shows an overview of sensor design; 1B, shows an overview of sensor operation; and 1C, shows an overview of system operation.

15 Figure 2 presents the relative differential resistance responses for various conducting polymer composite sensors to three representative alcohols.

Figure 3 shows a plot of pI_{50} predicted by equation 3 versus the actual experimental value. Horizontal error bars represents an average experimental error and vertical error bars correspond to the standard error of equation 3. The line
20 represents perfect agreement between experiment and prediction.

Figure 4 shows a diagram illustrating the M and A steric parameters.

Figure 5 shows a table where the first three columns give the name of the alcohol, its experimental pI_{50} value and run in which it was analyzed (and the bubbler in which it was placed). The remainder of the table lists the responses
25 (expressed as percent change in electrical resistance relative to base line resistance) of the 19 different polymer/carbon black sensors upon exposure to the alcohols at 5% of their respective saturated vapor pressures. The standard deviation of the responses over ten trials are given in parenthesis. Sensor 14 was not functioning. The last four alcohols were not used in building the model.

- 5 -

Description of the Preferred Embodiments

The approach described herein uses experimental data (e.g. a signal profile, such as a resistance fingerprint) that is generated by an array of
5 differentially responsive sensors. Such sensors include, for example, chemically-sensitive resistor of a sensing array, such as that found in an "electronic nose" as described in USP 5,571,401 (the disclosure of which is incorporated herein), when it is exposed to a molecule of interest. The change in the electrical resistance of a chemically-sensitive resistor in such a sensing array can be related to the sorption
10 of a molecule of interest to the non-conductive regions of the chemically-sensitive resistor. The signals produced by a plurality of chemically-sensitive resistors having individual sorption criteria thus provide information on a number of chemically important properties, such as the hydrophobicity, molecular size, polarity, and hydrogen-bonding interactions of a molecule of interest, thus, for
15 example, creating a resistance profile or fingerprint of the molecule of interest based upon its chemical properties.

Another type of sensor, includes, for example, hydrogels containing a crystalline colloidal array (CCA) as disclosed in US Patent No. 5,854,078 (the disclosure of which is incorporated herein by reference). Such hydrogels undergo a
20 volume change in response to a specific chemical species. As the hydrogels are modulated in size the lattice spacing of the CCA embedded therein changes as well. The light diffraction, therefore, indicates the presence or absence of the stimuli that causes the volume of the hydrogel to change.

Yet another type of sensor includes those disclosed in US Patent No.
25 5,512,490 to Walt *et al.* (the disclosure of which is incorporated herein by reference). The optic sensor of this system is comprised of a supporting member and an array formed of heterogeneous, semi-selective thin films which function as sensing receptor units and are able to detect a variety of different analytes and ligands using spectral recognition patterns. Each formulation of sensing receptor
30 unit comprising the array of the optical sensor reacts with a plurality of different chemical compounds and compositions; and for each individual chemical

- 6 -

compound, provides a spectral response pattern over time (by changes in energy intensity, or by changes in wavelength or both of these parameters) which is indicative of the event and consequence of the reaction with a single compound.

- 5 The array also generates spectral responses and patterns from mixtures of different compounds based upon the optical responses from each of the individual compounds forming this mixture.

By "molecule of interest" or "analyte" is meant any number of various molecules. For example a molecule or analyte of interest may be a nucleic acid
10 (*e.g.*, DNA or RNA), a polypeptide (*e.g.*, an antibody, protein, enzyme), a biochemical (*e.g.*, a lipid, hormone, fatty acids, carbohydrate), pharmaceuticals, a chemical such as organics including, for example, alkanes, alkenes, alkynes, dienes, alicyclic hydrocarbons, arenes, alcohols, ethers, ketones, aldehydes, cyclic hydrocarbons, carbonyls, carbanions, polynuclear aromatics and derivatives of such
15 organics, *e.g.*, halide derivatives.

By "differentially responsive sensors" is meant any number of sensors that respond to the presence or interaction of a collection of molecules with the sensor by providing some measurable change. Each individual sensor does not uniquely probe the property of interest, thus any individual signal alone is not
20 sufficient to determine the desired chemical or biological property of an analyte. Instead the response pattern of a plurality of sensors is used to obtain the desired activity through comparison with a standard response pattern produced by an analyte with a known activity. Such measurable changes include changes in optical wavelengths, transparency of a sensor, resonance of a sensor, resistance, diffraction
25 of light and/or sound, and other changes easily identified to those skilled in the art. Such sensors include, but are not limited to, crystalline colloidal array (CCA) sensors and variants, such as hydrogels containing CCA, metal oxide sensors, dye-impregnated polymers coated onto beads or optical fibers, bulk conducting organic polymers, and capacitance sensors.

- 30 In a traditional assay method, a desired chemical or biological activity is determined by the response of one designed sensor or interest. This single response

- 7 -

is known to probe the chemical and/or biological activity of interest, and the magnitude of the sensor response is then readily and directly related to the activity of concern. For instance, enzymatic inhibition by a certain ligand could be

5 determined from an assay that probed directly the amount of substrate consumed by the enzyme under various conditions or indirectly by the amount of product metabolized under known and calibrated conditions. Different ligands would produce different amounts of substrate consumption or metabolite products, and the amounts of such would directly indicate the desired biological property, the ligand

10 inhibition of the enzymatic activity. Another example would be determination of the presence of a particular nucleic acid sequence in a sample through investigating the response of array of sensors, each of which had complements to different but known or knowable sequences of nucleic acids. The sensor that displayed the highest response change (for instance, florescence appearance or disappearance,

15 electrochemical activity or disappearance of electrochemical activity, etc.) would then be uniquely associated with the presence of the sequence of interest in the sample, through knowledge of the complementary sequence that was present on that particular sensing element and association of the knowledge of the complementary sequence with the sequence that must then be present in the analyte of interest.

20 The present invention utilizes a different approach. A plurality of differentially responsive sensors, each of which provides measurable signals in response to a variety of analytes, chemicals, and biochemicals of concern, is used. The desired chemical or biological activity is not revealed by the response of an individual sensor or individual sensor response signal, but is instead obtained by

25 pattern analysis of the responses produced by a plurality of differentially responsive sensors in the sensor array device. The sensors may or may not themselves be selective and predetermined to uniquely probe the chemical or biological property of interest, but the various differing response patterns produced by the analytes of interest upon exposure to the plurality of sensors is correlated with the desired

30 chemical and/or biological activity after comparison of the response pattern to the pattern produced by an analyte with a known chemical and/or biological activity.

- 8 -

By allowing interactions between a molecule of interest and a differentially responsive sensor, the signals can be directly or indirectly related to the properties of the molecule of interest. For example, by using a chemically-sensitive resistor in an array of an "electronic nose" it is possible to directly and indirectly relate the signals of the electronic nose to the properties of the molecules of interest. For example, if the significant interactions between a molecule and the binding site of an enzyme are related either directly or indirectly in the collection of binding constants of that molecule to a non-conductive element of the electronic nose, then it is possible to relate the electronic nose signal to the enzyme's binding properties.

Once a signature of a set of molecules has been obtained, the signature profile could be used, with an appropriate training set to predict the activity of any member of the library in a chemical interaction of interest.

As described in the Example below, which is not meant to limit the present claims, the inventor has demonstrated that an electronic nose is capable of identifying alcohols having chemical characteristics that are capable of inhibiting cytochrome P-450 activity. Such chemical characteristics are related to various chemical-physical parameters of the alcohol including its three-dimensional structure, side groups, charge, and other parameters known to those of skill in the art.

The methods and apparatus of the present invention are applicable to a wide range of molecules of interest and types of sensors and arrays. For example, and not by way of limitation, one embodiment provides a method which can be used to identify polypeptides having a biological function. Such functions include a polypeptide's role as a receptor, receptor antagonist or agonist, enzymatic activity (*e.g.*, lipases, esterases, proteases, glycosidases, glycosyl transferases, phosphatases, kinases, mono- and dioxygenases, haloperoxidases, lignin peroxidases, diarylpropane peroxidases epoxide hydrolases, nitrile hydrolases, nitrilases, transaminases, amidases and acylases), DNA-binding ability (*e.g.*, histones), antibody activity (*e.g.*, the ability to bind an epitope), such antibodies include

- 9 -

monoclonal, polyclonal and humanized antibodies to name a few. The activity can be determined based on the polypeptides primary, secondary, and/or tertiary structure as well as its charge, hydrophobicity, hydrophilicity and other polypeptide properties known to those of skill in the art as compared to a library of similar polypeptide molecules. The differentially responsive sensors (*e.g.*, a chemically-sensitive resistor) of an array for detection of such properties are designed as described herein or in any number of ways known to those of skill in the art. The differentially responsive sensors do not need to be specially designed to bind a specific polypeptide. For example, where the sensor is of a resistor-type, the elements do not need to be specially designed to bind such polypeptides so long as they are capable of detecting properties by interactions of the polypeptide or molecule of interest with the chemically-sensitive resistor.

In another embodiment, the present invention provides a method of detecting the activity of a biological molecule or pharmaceutical compound. The method provides contacting a plurality of differentially responsive sensors with a compound or molecule of interest and then comparing the "fingerprint" (*e.g.*, a resistance fingerprint) or "profile" with the fingerprint of other related molecules having a desired activity or function. Molecules having similar fingerprints are indicative of molecules having similar activities. Such activities can range from the detection of disease molecules (*e.g.*, viral antigens, bacterial antigens, such as LPS, endotoxin, *etc.*), carcinogenic molecules, antibiotic molecules, antiviral molecules, viral compounds and any number of molecules now known or discovered, so long as they are capable of interacting with a plurality of sensors thus eliciting a change in for example, optics, resonance, and/or current across the sensor (*e.g.*, increase or decrease in the resistance).

Learning based and/or pattern-recognition based algorithms are used to identify leads from the library based on the data contained in the experimental response patterns, without the need necessarily for additional assays or for additional computations on the remaining members of the library. Additionally, one advantage of the invention is that it provides an experimentally based measure

- 10 -

of the molecular properties involved in the desired binding event. Once a pattern has been recorded for a library, it remains associated with that library indefinitely and can be used for other purposes subsequently. For example, after screening a
5 library for leads in activity towards a given binding site, with a few new examples on another binding site, the patterns can then be interrogated again to produce leads for this new target event without the need to recollect the response patterns nor to reassay the entire library for activity towards that particular new process.

The differentially responsive sensors in the array need not be carefully
10 tailored towards the molecule of interest. Instead, it is sufficient that they collectively probe a broad range of molecular properties, for example, hydrophobicity, polarity, molecular size or shape, chirality, and other chemical-physical characteristics known in the art. Each individual sensor need not selectively probe these properties, nor is it essential that the experimentalist
15 evaluate in advance which properties are being probed by the array. For example, an array may have any number of responsive sensors from one to greater than 10^6 . In a preferred embodiment, wherein the sensors are resistors the array would have a significant (>10) number of chemically-sensitive detectors or resistors, each of which would be at least partially responsive to certain properties that affect
20 molecular binding and recognition events.

The signal transduction mechanism through which the analyte or molecule produces an array response or resistance fingerprint is potentially quite broad. Many methods are known to those skilled in the art of constructing artificial nose devices. These include arrays of surface acoustic wave devices,
25 quartz crystal micro-balances, dye-coated fiber optics, conducting organic polymers, electrochemical gas sensors, fiber optic micromirrors, composites of insulating organic polymers and conductors, tin oxide sensors, hydrogel based CCA, nucleic acid or protein based polymers (see for example Ramsey, Graham, Nature Biotech, 16:40-44, (1998)), and others readily identifiable to those skilled in the art.
30 Different types of signal transduction mechanisms could also be used in one array to expand the information contained in the response pattern produced by the analyte

- 11 -

or molecule of interest, for example optical, electrical, and/or resonance.

When the differentially responsive sensor is a resistor, the resistor comprises a plurality of alternating non-conductive and conductive regions transverse to an electrical path between conductive leads. Generally, the resistors are fabricated by blending a conductive material with a non-conductive material such that the electrically conductive path between the leads coupled to the resistor is interrupted by gaps of non-conductive material. For example, in a colloidal suspension or dispersion of particulate conductive material in a matrix of non-conductive material, the matrix regions separating the particles provide the gaps. The non-conductive gaps range in path length from about 10 to 1,000 angstroms, usually on the order of 100 angstroms providing individual resistance of about 10 to 1,000 m Ω , usually on the order of 100 m Ω , across each gap. The path length and resistance of a given gap is not constant but rather is believed to change as the nonconductive organic polymer of the region absorbs, adsorbs or imbibes an analyte. Accordingly the dynamic aggregate resistance provided by these gaps in a given resistor is a function of analyte permeation of the non-conductive regions. However, it will be recognized that materials which change conformationally, or effect a proton distribution or availability, in response to the binding of an analyte are also encompassed by the present disclosure. For example, a non-conductive material which results in a proton change upon binding of an analyte can cause an exponential change in the resistance of the chemically-sensitive resistor. In some embodiments, the conductive material may also contribute to the dynamic aggregate resistance as a function of analyte permeation (*e.g.*, when the conductive material is a conductive material such as a polypyrrole).

A wide variety of conductive materials and non-conductive materials can be used. Table 1 provides exemplary conductive materials for use in resistor fabrication; mixtures, such as of those listed, may also be used. Table 2 provides exemplary non-conductive materials; blends and copolymers, such as the materials listed here, may also be used. Combinations, concentrations, blend stoichiometries, percolation, threshold, *etc.* are readily determined empirically by fabricating and

- 12 -

screening prototype resistors (chemiresistors) as described below.

- 13 -

TABLE 1

Major Class	Examples
Organic Conductors	conducting polymers (poly(anilines), poly(thiophenes), poly(pyrroles), poly(aceylenes, <i>etc.</i>)), carbaceous material (carbon blacks, graphite, coke, C60 <i>etc.</i>), charge transfer complexes (tetramethylparaphnylenediamine-chloranile, alkali metal tetracyanoquinodimethane complexes, tetrathiofulvalene halide complexes, <i>etc.</i>), <i>etc.</i>
Inorganic Conductors	metals and metal alloys (Ag, Au, Cu, Pt, AuCu alloy, <i>etc.</i>), highly doped semiconductors (Si, GaAs, InP, MoS ₂ , TiO ₂ , <i>etc.</i>), conductive metal oxides (In ₂ O ₃ , SnO ₂ , Na ₂ Pt ₃ O ₄ , <i>etc.</i>), superconductors (Yba ₂ Cu ₃ O ₇ , Ti ₂ Ba ₂ Ca ₂ Cu ₃ O ₁₀ , <i>etc.</i>), <i>etc.</i>
Mixed inorganic/organic Conductor	Tetracyanoplatinate complexes, Iridium halocarbonyl complexes, stacked macrocyclic complexes. <i>Etc.</i>

- 14 -

TABLE 2

Major Class	Examples
Main-chain carbon polymers	poly(dienes), poly(alkenes), poly(acrylics), poly(methacrylics), poly(vinyl ethers), poly(vinyl thioethers), poly(vinyl alcohols), poly(vinyl ketones), poly(vinyl halides), poly(vinyl nitrites), poly(vinyl esters), poly(styrenes), poly(aryines), <i>etc.</i>
Main-chain acyclic heteroatom polymers	poly(oxides), poly(caronates), poly(esters), poly(anhydrides), poly(urethanes), poly(sulfonate), poly(siloxanes), poly(sulfides), poly(thioesters), poly(sulfones), poly(sulfonamindes), poly(amides), poly(ureas), poly(phosphazens), poly(silanes), poly(silazanes), <i>etc.</i>
Main-chain heterocyclic polymers	poly(furantetracarboxylic acid diimides), poly(benzoxazoles), poly(oxadiazoles), poly(benzothiazinophenothiazines), poly(benzothiazoles), poly(pyrazinoquinoxalines), poly(pyromenitimides), poly(quinoxalines), poly(benzimidazoles), poly(oxidoles), poly(oxoisinodolines), poly(diaxisoindoines), poly(triazines), poly(pyridzaines), poly(pioeraziness), poly(pyridinees), poly(pioeridiens), poly(triazoles), poly(pyrazoles), poly(pyrrolidines), poly(carboranes), poly(oxabicyclononanes), poly(diabenzofurans), poly(phthalides), poly(acetals), poly(anhydrides), carbohydrates, <i>etc.</i>

The chemiresistors can be fabricated by many techniques such as, but not limited to, solution casting, suspension casting, and mechanical mixing. In

- 15 -

general, solution case routes are advantageous because they provide homogenous structures and ease of processing. With solution case routes, resistor elements may be easily fabricated by spin, spray or dip coating. Since all elements of the resistor must be soluble, however, solution case routes are somewhat limited in their applicability. Suspension casting still provides the possibility of spin spray or dip coating but more heterogenous structures than with solution casting are expected. With mechanical mixing, there are fewer solubility restrictions since it involves only the physical mixing of the resistor components but device fabrication is more difficult since spin, spray and dip coating are no longer possible. A more detailed discussion of each of these follows.

For systems where both the conducting and non-conducting media or their reaction precursors are soluble in a common solvent, the chemiresistors can be fabricated by solution casting. The oxidation of pyrrole by phosphomolybdic acid presented herein represents such a system. In this reaction, the phosphomolybdic acid and pyrrole are dissolved in tetrahydrofuran (THF) and polymerization occurs upon solvent evaporation. This allows for THF soluble non-conductive polymers to be dissolved into this reaction mixture thereby allowing the blend to be formed in a single step upon solvent evaporation. The choice of non-conductive material in this route is, of course, limited to those that are soluble in the reaction media. For the poly(pyrrole) case described above, preliminary reactions were performed in THF, but this reaction should be generalizable to other non-aqueous solvent such as acetonitrile or ether. A variety of permutations on this scheme are possible for other conducting material. Some of these are listed below. Certain conducting materials, such as substituted poly(cyclooctatetraenes), are soluble in their undoped, non-conducting state in solvents such as THF or acetonitrile. Consequently, the blends between the undoped material and plasticizing material can be formed from solution casting. After which, the doping procedure (exposure to I_2 vapor, for instance) can be performed on the blend to render the substituted

- 16 -

poly(cyclooctatetraene) conductive. Again, the choice of non-conductive materials is limited to those that are soluble in the solvents that the undoped conducting material is soluble in and to those stable to the doping reaction. Certain conducting materials can also be synthesized via a soluble precursor material. In these cases, blends between the precursor material and the non-conducting material can first be formed followed by chemical reaction to convert the precursor material into the desired conducting material. For instance poly(p-phenylene vinylene) can be synthesized through a soluble sulfonium precursor. Blends between this sulfonium precursor and the non-conductive material can be formed by solution casting. After which, the blend can be subjected to thermal treatment under vacuum to convert the sulfonium precursor to the desired poly(p-phenylene vinylene).

In suspension casting, one or more of the components of the resistor is suspended and the others dissolved in a common solvent. Suspension casting is a rather general technique applicable to a wide range of species, such as carbon blacks or colloidal metals, which can be suspended in solvents by vigorous mixing or sonication. In one application of suspension casting, the non-conductive material is dissolved in an appropriate solvent (such as THF, acetonitrile, water, *etc.*). Colloidal silver is then suspended in this solution and the resulting mixture is used to dip coat electrodes.

Mechanical mixing is suitable for all of the conductive/non-conductive combinations possible. In this technique, the materials are physically mixed in a ball-mill or other mixing device. For instance, carbon black: non-conductive material composites are readily made by ball-milling. When the non-conductive material can be melted or significantly softened without decomposition, mechanical mixing at elevated temperature can improve the mixing process. Alternatively, composite fabrication can sometimes be improved by several sequential heat and mix steps. Once fabricated, the individual elements can be optimized for a particular application by varying their chemical make up and morphologies. The chemical nature of the resistors determines to which analytes they will respond and

- 17 -

their ability to distinguish different analytes. The relative ratio of conductive to insulating components determines the magnitude of the response since the resistance of the elements becomes more sensitive to sorbed molecules as the percolation threshold is approached. The film morphology is also important in determining response characteristics. For instance, thin films respond more quickly to analytes than do thick ones. Hence, with an empirical catalogue of information on chemically diverse sensors made with varying ratios of insulating to conducting components and by differing fabrication routes, sensors can be chosen that are appropriate for the analytes expected in a particular application, their concentrations, and the desired response times. Further optimization can then be performed in an iterative fashion as feedback on the performance of an array under particular conditions becomes available.

The resistor may itself form a substrate for attaching the lead or the resistor. For example, the structural rigidity of the resistors may be enhanced through a variety of techniques: chemical or radiation cross-linking of polymer components (dicumyl peroxide radical cross-linking, UV-radiation cross-linking of poly(olefins), sulfur cross-linking of rubbers, e-beam cross-linking of Nylon, *etc.*), the incorporation of polymers or other materials into the resistors to enhance physical properties (for instance, the incorporation of a high molecular weight, high transition metal (Tm) polymers), the incorporation of the resistor elements into supporting matrices such as clays or polymer networks (forming the resistor blends within poly-(methylmethacrylate) networks or within the lamellae of montmorillonite, for instance), *etc.* In another embodiment, the resistor is deposited as a surface layer on a solid matrix which provides means for supporting the leads. Typically, the matrix is a chemically inert, non-conductive substrate such as a glass or ceramic.

Sensor arrays particularly well-suited to scaled up production are fabricated using integrated circuit (IC) design technologies. For example, the chemiresistors can easily be integrated onto the front end of a simple amplifier interfaced to an A/D converter to efficiently feed the data stream directly into a

- 18 -

neural network software or hardware analysis section. Micro-fabrication techniques can integrate the chemiresistors directly onto a micro-chip which contains the circuitry for analog signal conditioning/processing and then data analysis. Ink-jet technology can be used for the production of millions of incrementally-different sensor elements in a single manufacturing step. Controlled compositional gradients in the chemiresistor elements of a sensor array can be induced in a method analogous the way that a color ink-jet printer deposits and mixes multiple colors. However, in this case, rather than multiple colors, a plurality of different polymers in solution which can be deposited are used. A sensor array of a million distinct elements only requires a 1 cm x 1 cm sized chip employing lithography at the 10 μ m feature level, which is within the capacity of conventional commercial processing and deposition methods. This technology permits the production of sensitive, small-sized, stand-alone chemical sensors.

Preferred sensor arrays have a predetermined inter-sensor variation in the structure or composition of the non-conductive polymer regions. The variation may be quantitative and/or qualitative. For example, the concentration of the non-conductive material in the blend can be varied across sensors. Alternatively, a variety of different materials may be used in different sensors. In one embodiment, an electronic nose for detecting an analyte in a sample is fabricated by electrically coupling the sensor leads of an array of compositionally different sensors to an electrical measuring device. The device measures changes in resistivity at each sensor of the array, preferably simultaneously and preferably over time. Frequently, the device includes signal processing means and is used in conjunction with a computer and data structure for comparing a given response profile to a structure-response profile database for qualitative and quantitative analysis. Typically such a nose comprises at least ten, usually at least 100, and often at least 1000 different sensors though with mass deposition fabrication techniques described herein or otherwise known in the art, arrays of on the order of at least 10⁶ sensors are readily produced.

In operation, each resistor provides a first electrical resistance between

- 19 -

its conductive leads when the resistor is contacted with a first sample comprising a chemical analyte at a first concentration, and a second electrical resistance between its conductive leads when the resistor is contacted with a second sample comprising
5 the same chemical analyte at a second different concentration. The samples may be liquid or gaseous in nature. The first and second samples may reflect samples from two different environments, a change in the concentration of an analyte in a sample sampled at two time points, a sample and a negative control, *etc.* The sensor array necessarily comprises sensors which
10 respond differently to a change in an analyte concentration, *i.e.* the difference between the first and second electrical resistance of one sensor is different from the difference between the first and second electrical resistance of another sensor.

In a preferred embodiment, the temporal response of each sensor (resistance as a function of time) is recorded. The temporal response of each sensor
15 may be normalized to a maximum percent increase and percent decrease in resistance which produces a response pattern associated with the exposure of the analyte. By iterative profiling of known analytes, a structure-function database correlating analytes and response profiles is generated. Unknown analyte may then be
20 characterized or identified using response pattern comparison and recognition algorithms. Accordingly, analyte detection systems comprising sensor arrays, an electrical measuring device for detecting resistance across each chemiresistor, a computer, a data structure of sensor array response profiles, and a comparison algorithm are provided. In another embodiment, the electrical measuring device is
25 an integrated circuit comprising neural network-based hardware and a analog-digital converter (ADC) multiplexed to each sensor, or a plurality of ADCs, each connected to different sensor(s).

A wide variety of analytes and samples may be analyzed by the disclosed sensors, arrays and noses so long as the subject analyte is capable of
30 generating a differential response across a plurality of sensors of the array. Analyte applications include broad ranges of chemical classes such as organics such as

- 20 -

alkanes, alkenes, alkynes, dienes, alicyclic hydrocarbons, arenes, alcohols, ethers, ketones, aldehydes, carbonyls, carbanions, polynuclear aromatics and derivatives of such organics, *e.g.* halide derivatives, *etc.*, biomolecules such as sugars, isoprenes
5 and isoprenoids, fatty acids and derivatives, *etc.* Accordingly, commercial applications of the sensors, arrays and noses include environmental toxicology and remediation, biomedicine, materials quality control, food and agricultural products monitoring, *etc.*

The general method for using the disclosed sensors, arrays and
10 electronic noses, for detecting the characteristics or presence of an analyte in a sample involves sensing a change in a differentially responsive sensor to the presence of an analyte in a sample. For example, where the sensor is a resistor-type sensor, measurement in resistance changes where the chemical sensor comprises first and second conductive leads electrically coupled to and separated by
15 a chemically-sensitive resistor as described above by measuring a first resistance between the conductive leads when the resistor is contacted with a first sample comprising an analyte at a first concentration and a second different resistance when the resistor is contacted with a second sample comprising the analyte at a
20 second different concentration.

In one embodiment, a rapid method for individually addressing the members of the library and individually collecting their response patterns is desirable. In this embodiment, gases derived from a fluid are used wherein the analytes are vapors that are to be detected by their response on the sensor array. A
25 substrate contains the library (*e.g.*, analyte matrix) of interest whose response patterns are to be collected. The substrate may be cooled in order to reduce the vapors emanating from the molecules before analysis. The sensors (*e.g.* "chemically-sensitive resistors") are also placed within this analysis chamber. Either a carrier gas or a vacuum is present in order to insure that the chamber is
30 not contaminated with residual molecules of a prior analysis, inlet and outlet ports may be used to manipulate and control the gas flow. The sensors themselves may

- 21 -

also have a temperature control, as may the walls of the chamber. Cooling the walls of the chamber will prevent desorption of the impurities during an analysis and heating can be used to clean the chamber of such impurities at a subsequent
5 time. Temperature control of the sensors is beneficial to control the sensitivity, response time, and noise characteristics of the detectors in the sensor array.

In this embodiment, the library is cooled so that the vapor pressure of each individual molecular constituent is maintained at a background level until that particular species is to be analyzed. When a response pattern is to be recorded for
10 a molecule of interest, the region that contains the molecule of interest in the library is heated to volatilize it. This thereby produces vapors that can be transported to the detectors of the sensor array. This local heating could be performed by a laser spot, by an addressable resistive grid of wires that contacts the substrate or a portion of the substrate, or by other methods of heating that are
15 known to those skilled in the art of generating temperature excursions in materials. After the pattern is recorded for the spot of interest, the temperature is returned to its set point and another spot is interrogated. An alternative uses multiple sets of detectors in parallel, with
20 accompanying stimuli in parallel, to increase the throughput of analysis of an entire array if so desired.

Once a series of patterns has been collected, some initial information is desirable in order to identify leads for a particular activity or function. For example, experimental data might be available showing that members 1, 2, and 3 have increasing activity towards the activity or function of interest. Such activity or
25 function may be derived from known molecules whose activity has been well-characterized or may be subsequently or contemporaneously measured by additional assay techniques. Analysis of the patterns produced by the electronic nose array using neural network or statistical method -based programs would then identify which molecules, or which molecular properties being probed by the detectors,
30 showed a correlation with the specific or desired activity or function. Once this correlation is established, analysis of the remaining patterns would be used to

- 22 -

identify molecules with similar correlation, and thereby to identify the leads in the library for further interrogation and analysis both experimentally and theoretically, as appropriate.

5 The analysis of a resistance signal pattern (*e.g.* a resistance profile) of the embodiment may be implemented in hardware or software, or a combination of both (*e.g.*, programmable logic arrays or digital signal processors). Unless otherwise specified, the algorithms included as part of the invention are not inherently related to any particular computer or other
10 apparatus.

In particular, various general purpose machines may be used with programs written in accordance with the teachings herein, or it may be more convenient to construct more specialized apparatus to perform the operations. However, preferably, the embodiment is implemented in one or more computer
15 programs executing on programmable systems each comprising at least one processor, at least one data storage system (including volatile and non-volatile memory and/or storage elements), at least one input device, and at least one output device. The program code is executed on the processors to perform the functions described herein.

20 Each such program may be implemented in any desired computer language (including machine, assembly, high level procedural, or object oriented programming languages) to communicate with a computer system. In any case, the language may be a compiled or interpreted language.

Each such computer program is preferably stored on a storage media or
25 device (*e.g.*, ROM, CD- ROM, or magnetic or optical media) readable by a general or special purpose programmable computer, for configuring and operating the computer when the storage media or device is read by the computer to perform the procedures described herein. The system may also be considered to be implemented as a computer-readable storage medium, configured with a computer program,
30 where the storage medium so configured causes a computer to operate in a specific and predefined manner to perform the functions described herein.

- 23 -

The following Example, is provided to illustrate, but not limit, the scope of the present invention. For example, those skilled in the art will recognize that the methods and systems of the present invention are applicable to a wide variety of differentially responsive sensors, including optical, sound (resonance), resistance, or other sensors known to those of skill in the art.

EXAMPLE

To test the ability of the "electronic nose" to identify molecules of interest having a particular biological activity selected from a library of molecules of interest, a quantitative structure-activity relationship (QSAR) was used to predict the inhibitory action of a series of alcohols on cytochrome P-450 aniline p-hydroxylation.

Polymer synthesis and preparation. Polymers were generally dissolved in tetrahydrofuran, except for poly(4-vinylpyridine) and poly(vinylpyrrolidone), which were dissolved in ethanol, and poly(ethylene-co-vinyl acetate)(18% vinylacetate), 1,2-poly(butadiene), and poly(butadiene)(36% cis and 55% trans 1-4), which was dissolved in toluene. Each polymer (160 mg) was dissolved in its respective solvent (20 ml) either at room temperature or by heating to 35-40 °C for several hours. Carbon black (40 mg) was added and the suspension sonicated for at least 20 minutes.

Sensor Fabrication. Corning microscope slides were cut into 10 mm x 25 mm pieces to provide substrate for the sensor. A 7-8 mm gap across the middle of each piece was masked while 300 nm of chromium and then 500 nm of gold was evaporated onto the ends of the slides to form the electrical contacts. Sensors were formed by spin-coating polymer/carbon black suspensions onto the prepared substrates. The resulting films were then allowed to dry overnight.

Measurements. An automated flow system consisting of LabVIEW software, a pentium computer, and electronically controlled solenoid valves and mass flow controllers were used to produce and deliver selected concentration of solvent vapors to the detectors. To obtain the desired analyte concentration, a

- 24 -

stream of carrier gas was passed through a bubbler that had been filled with the solvent of choice. Saturation of the carrier gas with the solvent vapor was verified through measurement of the rate of mass loss of the solvent in the bubbler. The
5 vapor-saturated carrier gas was then diluted with pure carrier gas through the use of mass flow controllers (MKS Instruments, Inc). The carrier gas for all experiments was oil-free air, obtained from the general compressed air laboratory source, containing 1.10 +/- 0.15 parts-per-thousand (ppth) of water vapor. The air was filtered to remove particulates but deliberately was not dehumidified or otherwise
10 purified to reproduce a range of potential "real world" operating environments. Calibration of the flow system using a flame ionization detector (model 300 HFID, California Analytical Instruments, Inc.) Indicated that the delivered analyte concentrations were present.

Eight bubblers for generation of vapors were available, so the 22
15 alcohols and 2 diols were divided into 3 groups of 8 as indicated in Figure 5. To pre-condition the sensors, prior to each of the 3 runs, the sensors were subjected to 40 exposures, 5 to each of the 8 analytes. Data collection then consisted of a set of 10 exposures to the 8 analytes, with 80 exposures performed in randomized order to eliminate systematic errors from history effects. In the third run, bubbler 2 was
20 replaced by a pyrex tube 37 cm in length with a 1 cm inner diameter. This tube was loaded with approximately 25 cm of granular, solid neopentanol. Flow rates were calculated to give 100 ml/min of saturated vapor from the bubblers, which were of sufficient path length to provide saturated vapors. The background air flow was 1900 ml/min, so that the analyte concentration delivered to the sensors
25 was 5% of the analyte's saturated vapor pressure at room temperature. The ability of the vapor delivery system to provide the expected analyte concentrations based on the input and control settings to the mass flow controllers as verified using a calibrated flame ionization detector that sampled several test analyte gas streams being delivered to the sensor chamber.

30 An exposure had 300 seconds of background air flow, followed by 300 seconds of flow of analyte at 5% of its saturated vapor pressure, followed by 300

- 25 -

seconds of the background air. The DC resistance of each sensor was measured at intervals of approximately 6 seconds using a multiplexing ohmmeter. The baseline resistance of a sensor was taken as an average of all measurements of the resistance
5 of that sensor acquired over a 60 second period that started between 60 and 66 seconds prior to the start of the exposure to an analyte. The exact initiation time of this baseline resistance measurement was different for each sensor, due to small variations in the time interval required to read the set of 20 resistance values through the multiplexing ohmmeter. The resistance response for each sensor to an
10 analyte was taken as an average of all measurements for that sensor in a 60 second period that started between 234 and 240 seconds after the beginning of the presentation of the vapor to the sensors, with the exact initiation time for each sensor channel staggered similarly to that of the baseline resistance readings. A response was taken to be the change in resistance of a sensor, ΔR , divided by its
15 baseline resistance, R . All differential resistance values ($\Delta R/R$) used in the data analysis represented, or very closely approximated, the steady-state resistance readings obtained from the sensors during exposure to the analyte of interest.

Data Analysis. Initial raw data manipulation and calculation of
20 responses was performed using Microsoft Excel. Multiple Linear regression (MLR) was performed using either Excel or the QSAR {Define} module of the Cerius2 program (Molecular Simulations, Inc.) on a Silicon Graphics O2 computer. Many possible MLR models were created, compared, cross-bred, and evolved by the genetic function approximation on Cerius2.

25 Results. Figure 2 presents the relative differential resistance responses for various conducting polymer composite sensors to three representative alcohols, and Figure 5 summarizes all of the sensor response data for the various alcohols investigated in this work. Each alcohol produced a distinct, characteristic response pattern with the array of sensors chosen for use in the work. Other sensor arrays
30 comprising different polymer formulatives are clearly capable of providing response patterns useful in the present invention.

- 26 -

The responses of the 19 working sensors to 20 of the alcohols (Figure 5) were used to build a QSAR model. Benzyl alcohol and tert-amyl alcohol were excluded from the fit because their biological activities were anomalous. The two diols were also excluded while building the model.

The inhibitory action data of Cohen and Mannering (Mol. Pharmacol. 1973, 9, 383-397) are listed in Figure 5. The values are expressed as pI_{50} , where I_{50} is the concentration of the alcohol (in mM) at which the activity of the enzyme is 50% inhibited, and pI_{50} is the negative logarithm of I_{50} . More positive numbers correspond to more strongly inhibiting alcohols.

The QSAR equations consist of a linear combination of descriptors whose coefficients are obtained by a least-squares fitting of predicted to observed biological activity through multiple linear regression. Equation 1 represents a general set of QSAR equations,

$$A \cdot X_{1,1} + B \cdot X_{1,2} + C \cdot X_{1,3} + \dots + J \cdot X_{1,n} + K = Y_1 \quad (1a)$$

$$A \cdot X_{2,1} + B \cdot X_{2,2} + C \cdot X_{2,3} + \dots + J \cdot X_{2,n} + K = Y_2 \quad (1b)$$

20

$$A \cdot X_{m,1} + B \cdot X_{m,2} + C \cdot X_{m,3} + \dots + J \cdot X_{m,n} + K = Y_m \quad (1m)$$

where Y_i is the biological activity of the i^{th} molecule, X_{ij} is the value of the j^{th} descriptor for the i^{th} molecule, and A, B, C, . . . K are constants that are obtained through the fitting of Y_i (predicted) versus Y_i (observed). In Equation 1, the i^{th} alcohol's inhibitory activity is represented by Y_i and its n sensor responses are taken as its descriptors ($X_{i,1}$ to $X_{i,n}$).

The genetic function algorithm of the QSAR module of Cerius2 was used to select the best sensors for the QSAR. One hundred multiple linear regression models were generated from random combinations of 4 sensors. These models were ranked according to a lack-of-fit (LOF) parameter, as given by

- 27 -

equation 2:

$$\text{LOF} = \frac{\text{LSE}}{(1 - ((c + dp)/m))^2} \quad (2)$$

LSE is the least-squares error, c and p are both the number of descriptors (sets of relative differential resistance response of the sensors in the array) for a simple linear model such as the one herein, M is the number of samples (*e.g.*, alcohols), and d is the “smoothing parameter”, which is entered by the user (1.0 was used). The LOF value is therefore an inverse measure of how well the model fits the data, with a penalty for the use of a large number of descriptors relative to samples. From the set of 100 models, two “parents” are chosen, with a probability inversely proportional to their LOF, and “crossed over”-- some of the descriptors from each are used to form a new model. There is then a probability for “mutation”, where a new, randomly chosen, descriptor is added to the “daughter”. If the daughter is not already present in the population, it replaces the model with the worst LOF from the population. After 5,000 rounds of genetic operation, convergence is generally reached, in which the optimal models have been found.

When the 19 sets of responses from the working sensors were given to the Genetic Function Algorithm (GFA), a model that incorporated 5 of the sensors was found to be optimal. The best fit is described by equation 3:

$$(3) \quad pI_{50} = 0.51\text{-}3 + 1.90\text{-}9 - 3.58\text{-}13 - 2.14\text{-}15 - 0.90\text{-}18 - 1.29$$

n=20 R=0.995 s=0.092 F=297

The numbers in bold refer to sets of responses from the sensors with those numbers, n is the number of samples, R is the correlation coefficient, and s is the standard error. The correlation coefficient of 0.995 indicates that the fit was quite good. The F statistic of 297 indicates that the overall significance of the fit is very

- 28 -

high, in fact is at a level of $1 \cdot 10^{-13}$. Coefficients for all sensors are significant far beyond the 99.9% level, as attested to by their t statistics (see table 3). Predicted versus experimental pl_{50} values are plotted in Figure 3.

5

TABLE 3

Regression Statistics For the Coefficients of Equation 3

	Coefficient	Standard Error	t Stat	P-value
Intercept	-1.29	0.27	-4.71	3.32E-04
3	0.51	0.07	6.93	6.98E-06
9	1.90	0.19	9.92	1.03E-07
13	-3.58	0.21	-17.13	8.70E-11
15	-2.14	0.27	-7.91	1.56E-06
18	-0.90	0.08	-11.34	1.94E-08

10

The t statistic is equal to the value of the coefficient divided by its standard error; it is used to derive the P value, which indicates the significance of the coefficient.

15

Methanol has an inhibition activity distinctly different from that of the other alcohols, and this can lead to a misleadingly good fit through a "point and cluster" effect. A second least-squares fitting of equation 3 was performed with the exclusion of methanol. The coefficient of 15 changed from -2.14 to -2.20, while those of the other sensors remained nearly the same. The overall quality of the fit declined; F decreased from 297 to 109, corresponding to a decrease in the significance of the fit from the level of $1 \cdot (1 \times 10^{-13})$ to $1 \cdot (4 \times 10^{-10})$. The decrease quality of the fit occurs because methanol is modeled well by the equation, but when methanol is excluded there is much less variation in the data to be fit.

20

Electronic Nose-Based QSAR. The selection of which molecules to include in a QSAR is crucial. In the sense, that it is desirable to use the broadest set of molecules available to build a QSAR, while not including only one or two molecules from a distinctly different class of compounds. For example, benzyl alcohol, the only aromatic alcohol in the data set, has a higher activity than is

25

- 29 -

predicted by both our QSAR and another QSAR on the cytochrome P-450 system. The anomalous activity of benzyl alcohol could be accounted for with an additional descriptor unique to benzyl alcohol, but the choice of such a parameter is rather
5 arbitrary, so benzyl alcohol was excluded during the building of our QSAR. *Tert*-amyl alcohol was also excluded because there is evidence that tertiary alcohols function through a stimulatory mechanism in addition to the usual inhibitory mechanism. As would be expected in *tert*-amyl alcohol were also acting through this stimulatory mechanism, its inhibitory activity is anomalously low. The two
10 diols were also excluded while building the model. Because of these limitations, the QSAR is expected to be most successful at predicting the activity of aliphatic mono-alcohols having no other functionalities.

The sensors chosen for the model by the GFA are among those whose responses are most reproducible. Reproducibility was measured by examining the
15 set of 10 response of a given sensor to a given analyte. The value S_{ij} is defined as the standard deviation among the 10 responses of the j^{th} sensor to the i^{th} alcohol divided by the average of those responses. Each sensor has a set of 20 S values, one for each alcohol. A sensor's reproducibility can be gauged by the median of its set of S values. Four of the five sensors used in the model displayed median S
20 values less than 0.063, raking them among the best seven sensors. The only sensor outside this group, 15, responded only to very polar analytes. Since its response to the majority of the analytes was quite small, its S value for those analytes is very large. However, for the analytes to which it did respond, for example methanol and ethanol, its S values are small, 0.040 and 0.041, respectively. The inclusion of
25 15 might be questioned if it were necessary only to model the activity of one analyte, namely the outlier methanol. To test the validity of including 15 in the QSAR, equation 3 was refit with the same set of sensors and all of the previously used alcohols, excluding methanol. In the new QSAR, the significance of 15 remains significant. If the set of five sensor responses to methanol are substituted
30 into the second QSAR equation, which was formed with no information about methanol, the predicted pI_{50} of methanol is -3.12 very close to its experimental

- 30 -

value of -3.09. It appears that whatever molecular characteristics are probed by 15
are successfully extrapolated from the more moderately polar analytes to methanol.
In other words, 15 is not just an indicator variable for methanol that is fit with an
5 arbitrary coefficient.

A quantitative measure of the predictive power of the QSAR can be
obtained by building a model using the biological and sensor response data from all
the molecules except one, and then predicting the activity of the excluded molecule
with that model. The procedure is repeated for each molecule in the data set, and
10 the predictive sum of squares (PRESS) is defined as the sum, over all analytes, of
the squared differences between the predicted and actual biological activity. Using
equation 3, the PRESS for the set of 20 alcohols is 0.221. This value can be
compared to the residual sum of squares, RSS, in which one QSAR equation (fit to
all samples) is used to calculate the predicted activity. As would be expected, the
15 RSS of 0.117 is lower than the PRESS. More significantly, a large difference
between the PRESS and RSS
would imply that the model had used too many parameters and overfit the data, and
this appears not to be the case.

An optimum fit (as judged by the LOF parameter) was found to require
20 five descriptors; no equation with a different number of descriptors formed as
significant a model. The best 4 sensors QSAR, consisting of sensors 1, 13, 16 and
17, has an $R=0.984$, $s=0.163$, and $F=114$, indicating an overall significance at the
level of $1 - (5 \times 10^{-11})$. On the other hand, addition of further sensors adds
parameters and enables a better fit to the data set. However, if 4 is added to
25 equation 3 to form the best 6-sensor equation, certain key statistics point to a
diminished model. As would be expected with an additional parameter, R
increases, from 0.995 to 0.996. Additionally, the standard error decreases from
0.0916 to 0.0834, the RSS decreases from 0.117 to 0.090, and the F statistic
increases from 297 to 300. However, the significance of the fit, represented by the
30 F statistic, decreases from $1 - (1.08 \times 10^{-13})$ to $1 - (3.66 \times 10^{-13})$. The PRESS
increases from 0.221 to 0.253. Thus, although the 6-sensor model fits the set of 20

- 31 -

alcohols better than the 5-sensor model, the 6-sensor model is worse at predicting the activity of an alcohol that was not included in the fit, indicating that the 6-sensor model has overfit the data.

- 5 As described above, the cytochrome P-450 p-hydroxylation inhibition activities of all the aliphatic mono-alcohols investigated in this work could be quite accurately predicted from a model that was constructed without the use of any information about the molecular structure of the alcohols for which the prediction are made. This indicates that the resistance data output of the electronic nose
- 10 contains implicit information on most of the chemical factors that control the interactions of the enzyme with the alcohols. These resistance data reflect the binding interactions between the alcohols and a collection of polymers having a diverse collection of chemical attributes. It is not necessary that an individual polymer probe specifically and exclusively one such descriptor of the analyte-
- 15 substrate interaction, because the desired information can be obtained through analysis of the collective response of the sensor array to an analyte.

- Comparison with Other QSARs. Cohen and Mannering fit the activity of 11 of the unbranched 1- and 2-alcohols (excluding methanol) to a one parameter equation using log P (J. Mol. Pharmacol. 1973, 9, 383-397). A modified version,
- 20 using updated log P values and fit to only 10 alcohols (excluding methanol and ethanol), was given later by Shusterman (equation 4) (Chem.-Biol. Interactions 1990, 74, 63-77).

$$\begin{array}{lcl} \text{pI50} = 0.43 \log P - 0.53 & & (4) \\ N = 10 & R = 0.954 & s = 0.128 \end{array}$$

- 25 However, Shusterman also showed that for a larger set of alcohols, a simple fit to log P was inadequate to describe most of their activity; a fit of 19 alcohols yielded equation 5, which has rather poor regression statistics.

$$\text{pI50} = 0.35 \log P - 0.71 \quad (5)$$

- 32 -

$$n=19 \quad R=0.505 \quad s=0.468$$

In a second equation using two descriptors, $\log P$ and $(\log p)^2$, Cohen and Mannering fit 17 of the alcohols with an R of 0.98 (equation 6).

$$\begin{aligned} 5 \quad pI_{50} &= 1.50 \log P - 0.36(\log P)^2 + 1.75 \\ n &= 17 \quad R = 0.98 \quad s = 0.44 \end{aligned}$$

Although this was a better fit, it used more descriptors. Additionally, it is evident from inspection of the data that there are factors besides hydrophobicity that determine an alcohol's activity. Four subsequent QSARs have therefore been used
10 to model; the data set more fully and some aspects of these models are discussed below.

A more complex, three parameter, QSAR was based upon $\log P$, a calculated electronic parameter (ϵ_{HOMO}), and a steric parameter (BULK_{lat}) (equation 7).

$$\begin{aligned} 15 \quad pI_{50} &= 16.2 \log P - 16.0 \log(\beta P + 1) - 1.35 \text{BULK}_{\text{lat}} + 0.381 \epsilon_{\text{HOMO}} + 22.5 \quad (7) \\ n &= 21 \quad R = 0.982 \quad s = 0.170 \quad \log \beta = 1.05 \end{aligned}$$

Shusterman and Johnson, however, pointed out that the use of ϵ_{HOMO} as a parameter was unjustified since it was necessary only to fit benzyl alcohol, and becomes an insignificant parameter (as indicated by its t value) when benzyl alcohol is excluded
20 from the data set. Similarly, the bilinear dependence of pI_{50} upon $\log P$ of equation 7 was necessary only to fit a single data point, methanol.

Another QSAR, based on a choice of molecular connectivity indices, has also been used to model the activity of 20 alcohols (benzyl alcohol and tert-amyl alcohol were excluded (equation 8).

$$\begin{aligned} 25 \quad pI_{50} &= -6.88(1^\circ \chi) - 1.14 {}^4 \chi_{\text{PC}} + 1.85 \quad (8) \\ n &= 20 \quad R = 0.983 \quad s = 0.156 \end{aligned}$$

- 33 -

The parameter $^0\chi^v$, the zero-order valence molecular connectivity index, basically corresponds to molecular size, and therefore hydrophobicity, for this set of molecules. Hence, the inverse of the index has a negative coefficient in equation 8.

- 5 The parameter $^4\chi_{PC}$, the fourth-order path/cluster molecular connectivity index, correlates with the degree of branching in

the molecule, and therefore also has a negative coefficient in equation 8.

A third QSAR, which relies entirely upon calculated electronic parameters as descriptors, has been constructed and used to fit all 22 alcohols.

- 10 Shusterman noted problems with the QSAR. For example, it was asserted that the α -carbon of the alcohols was acting as an electron acceptor from the enzyme, because a correlation between activity and QCL, the electron density on the α -carbon in the LUMO, was found. QCL is correlated with log P ($R=0.747$), to some extent explaining the fit. Two alcohols, 3-methylbutanol and 2,4-dimethyl-3-
- 15 pentanol, were poorly fit, and no rationalization was presented for why the correlation with QCL would not apply to these two substrates as well.

- Finally, Shusterman created a QSAR based on log P and two steric parameters, M and A, which were used to describe the branching of the alcohols. M is the number of carbons beyond the methyl substituent in Figure 3, thus, 1- and
- 20 2-alcohols have an $M=0$, while M for 3-pentanol would be one, and for 2,4-dimethyl-3-pentanol is 2. The second parameter, A, refers to the number of branched carbons in the main chain, $A=1$ for 2-methyl-1-butanol and 2 for neopenyl alcohol. A fit of 19 of the alcohols (benzyl alcohol, tert-amyl alcohol, and methanol were excluded) yielded equation 9. The negative coefficient for M
- 25 and A indicate the loss of activity with branching.

$$\begin{aligned} \text{pI50} &= 0.48 \log P - 0.65 \cdot M - 0.31 \cdot A - 0.60 & (9) \\ n &= 19 & R = 0.955 & s = 0.171 \end{aligned}$$

To compare the electronic nose QSAR to those of Sabljic and

- 34 -

Shusterman, one must use statistics that take into account the number of descriptors used. Table 4 lists the comparison of selected regression statistics from the QSAR of Sabljic, Shusterman, equation 3, and the QSAR created when the coefficients of equation 3 were fit to the 19 alcohols besides methanol (R is the correlation coefficient, s is the standard error, and the final column is the overall significance of the regression equation). Because the electronic nose QSAR model uses more parameters, it is inappropriate to compare just either the correlation coefficients, standard error, or residual sum of squares of the models. To some extent, the PRESS should be independent of the number of parameters in a model, since the model is tested upon molecules about which it has no information. The PRESS of the electronic nose QSAR model is significantly lower than the other two models of interest. Finally, the F statistic gauges the overall significance of the fit while accounting for the number of parameters used. By this measure, the electronic nose QSAR is approximately as significant as Sabljic's and more significant than Shusterman's.

- 35 -

TABLE 4

	Data pts fit	descriptors used	R	s	RSS	PRESS	F	Signifi- cance F
Sabljić	20	2	0.983	0.156	0.414	0.872	250	2.51E-13
Shusterman	19	3	0.956	0.17	0.436	0.786	53	3.34E-08
Present Disclosure	20	5	0.995	0.092	0.117	0.221	297	1.08E-13
Present Disclosure (no methanol)	19	5	0.988	0.095	0.117	0.243	109	3.89E-10

10 It appears that the important chemical interaction involved in the
partitioning of the aliphatic alcohols into the enzyme binding site are probed by the
array responses. The construction of our QSAR did not require making assumption
regarding which steric or electronic factors are important or what parameters to use to
capture such effects. Obtaining chemical insight into the nature of the dominant
15 binding forces involved in the reaction being modeled would require a complete
understanding of the chemical factors that determine the analyte partitioning into each
polymer in the electronic nose. In principle it is possible to extract such information
for certain descriptors of interest, but it is not necessary to have such information in
order to use the readily-obtained electronic nose data to predict successfully the
20 activity of various alcohols in inhibiting cytochrome P-450 activity.

Although only a few embodiments have been described in detail above,
those having ordinary skill in the art will certainly understand that many
modifications are possible in the preferred embodiment without departing from the
teachings thereof.

25 All such modifications are intended to be encompassed within the
following claims.

- 36 -

What is claimed is:

1. A method for screening molecules for a specific activity, structure or function, comprising the steps of:
 - a) contacting a plurality of differentially responsive sensors with a molecule of interest;
 - 5 b) measuring a signal output from each sensor of the plurality of differentially responsive sensors;
 - c) using the results of said measuring to obtain a signal profile, related to a change in signal output from each sensor; and
 - d) comparing the signal profile to at least one previously-obtained signal
- 10 profile indicating a standard sample having a specific activity, structure or function, wherein the signal profile is indicative of a specific activity, function, or structure.
2. The method of claim 1, wherein the molecule of interest is selected from the group consisting of a nucleic acid, a polypeptide, a biochemical, and a chemical.
- 15 3. The method of claim 2, wherein the nucleic acid is DNA or RNA.
4. The method of claim 2, wherein the polypeptide is selected from the group consisting of an antibody, enzyme, and protein.
5. The method of claim 2, wherein the biochemical is selected from the group consisting of a lipid, hormone, fatty acids, and carbohydrate.
- 20 6. The method of claim 2, wherein the chemical is an organic selected from the group consisting of alkanes, alkenes, alkynes, dienes, alicyclic hydrocarbons, arenes, alcohols, ethers, ketones, aldehydes, carbonyls, carbanions, polynuclear aromatics and derivatives thereof.

- 37 -

7. The method of claim 4, wherein the antibody is a monoclonal antibody, polyclonal antibody, humanized antibody, or fragments thereof.
8. The method of claim 4, wherein the enzyme is selected from the group consisting of lipases, esterases, proteases, glycosidases, glycosyl transferases, 5 phosphatases, kinases, mono- and dioxygenases, haloperoxidases, lignin peroxidases, diarylpropane peroxidases, epoxide hydrolases, nitrile hydratases, nitrilases, transaminases, amidases and acylases.
9. The method of claim 1, wherein the specific activity is selected from the group consisting of enzymatic activity, binding activity, inhibitory activity, 10 modulating activity.
10. The method of claim 1, wherein the specific structure is selected from the group consisting of a three-dimensional structure, amino acid sequence, and nucleic acid sequence.
11. The method of claim 1, wherein the differentially responsive sensor 15 senses changes in optics, resonance, current, or combinations thereof.
12. The method of claim 1, wherein the differentially responsive sensor is selected from the group consisting of crystalline colloidal array (CCA) containing sensors, metal oxide sensors, dye-impregnated polymers coated onto beads or optical fibers, bulk conducting organic polymers, capacitance sensors, chemically- 20 sensitive resistor sensors and combinations thereof.
13. A method for screening molecules for a specific activity, structure or function comprising the steps of:
- a) measuring outputs of a plurality of chemically-sensitive resistors, each resistor comprising a conductive material and a non-conductive material;

- 38 -

- b) using results of said measuring to obtain a signal profile, related to a change in resistance in the plurality of resistors; and
- c) comparing the signal profile to at least one previously-obtained signal profile indicating a standard sample having a specific activity, structure or function,
- 5 wherein the signal profile is indicative of a specific activity, structure, or function.

14. The method of claim 13, wherein the molecule is selected from the group consisting of a nucleic acid, a polypeptide, a biochemical, and a chemical.
15. The method of claim 14, wherein the nucleic acid is DNA or RNA.
16. The method of claim 14, wherein the polypeptide is selected from the
- 10 group consisting of an antibody, enzyme, and protein.
17. The method of claim 14, wherein the biochemical is selected from the group consisting of a lipid, hormone, fatty acids, and carbohydrate.
18. The method of claim 14, wherein the chemical is an organic selected from the group consisting of alkanes, alkenes, alkynes, dienes, alicyclic
- 15 hydrocarbons, arenes, alcohols, ethers, ketones, aldehydes, carbonyls, carbanions, polynuclear aromatics and derivatives thereof.
19. The method of claim 16, wherein the antibody is a monoclonal antibody, polyclonal antibody, humanized antibody, or fragments thereof.
20. The method of claim 16, wherein the enzyme is selected from the group
- 20 consisting of lipases, esterases, proteases, glycosidases, glycosyl transferases, phosphatases, kinases, mono- and dioxygenases, haloperoxidases, lignin peroxidases, diarylpropane peroxidases, epoxide hydrolases, nitrile hydrolases, nitrilases, transaminases, amidases and acylases.

- 39 -

21. The method of claim 13, wherein the specific activity is selected from the group consisting of enzymatic activity, binding activity, inhibitory activity, modulating activity.
22. The method of claim 13, wherein the specific structure is selected from
5 the group consisting of three-dimensional polypeptide structure, amino acid sequence, and nucleic acid sequence.
23. The method of claim 13, wherein the resistor comprises a mixture of a conductive material compositionally different than the non-conductive material, each resistor providing an electrical path through the mixture, wherein interaction
10 of the sample with the resistor provides a change in resistance in the mixture.
24. The method of claim 13, wherein the signal profile of the standard sample is derived from a library.
25. The method of claim 24, wherein the library is generated by a neural network.
- 15 26. A molecule screening system, comprising:
a sensor array comprising a plurality of differentially responsive sensors, having a first signal profile produced by the plurality of differentially responsive sensors, when contacted with a first analyte at a first concentration and a second different signal profile when contacted with a second analyte, wherein the
20 difference between the first signal and the second signal being indicative of a property of the first analyte and second analyte;
a measuring device, connected to the sensor array; and
a computer;
the measuring device detecting the first and second signal in each of the
25 plurality of differentially responsive sensors and the computer assembling the signal

- 40 -

into a sensor array signal profile;

wherein the computer is operative to compare the signal profile to at least one previously obtained signal profile indicating a standard sample having a specific activity, structure of function, wherein the signal profile is indicative of a specific activity, structure or function of the analyte.

27. The system of claim 26, wherein the sample is selected from the group consisting of a nucleic acid, a polypeptide, a biochemical, and a chemical.

28. The system of claim 27, wherein the nucleic acid is DNA or RNA.

29. The system of claim 27, wherein the polypeptide is selected from the group consisting of an antibody, enzyme, and protein.

30. The system of claim 27, wherein the biochemical is selected from the group consisting of a lipid, hormone, fatty acids, and carbohydrate.

31. The system of claim 27, wherein the chemical is an organic selected from the group consisting of alkanes, alkenes, alkynes, dienes, alicyclic hydrocarbons, arenes, alcohols, ethers, ketones, aldehydes, carbonyls, carbanions, polynuclear aromatics and derivatives thereof.

32. The system of claim 29, wherein the antibody is a monoclonal antibody, polyclonal antibody, humanized antibody, or fragments thereof.

33. The system of claim 29, wherein the enzyme is selected from the group consisting of lipases, esterases, proteases, glycosidases, glycosyl transferases, phosphatases, kinases, mono- and dioxygenases, haloperoxidases, lignin peroxidases, diarylpropane peroxidases, epoxide hydrolases, nitrile hydratases, nitrilases, transaminases, amidases and acylases.

- 41 -

34. The system of claim 26, wherein the specific activity is selected from the group consisting of enzymatic activity, binding activity, inhibitory activity, modulating activity.

35. The system of claim 26, wherein the specific structure is selected from
5 the group consisting of three-dimensional polypeptide structure, amino acid sequence, and nucleic acid sequence.

36. The system of claim 26, wherein the signal profile of the standard sample is derived from a library.

37. The system of claim 36, wherein the library is generated by a neural
10 network.

38. The system of claim 26, wherein the differentially responsive sensor senses changes in optics, resonance, current, or combinations thereof.

39. The system of claim 26, wherein the differentially responsive sensor is selected from the group consisting of crystalline colloidal array (CCA) containing
15 sensors, metal oxide sensors, dye-impregnated polymers coated onto beads or optical fibers, bulk conducting organic polymers, capacitance sensors, chemically-sensitive resistor sensors and combinations thereof.

40. The system of claim 39, wherein the chemically-sensitive resistor sensors comprise a mixture of a conductive material compositionally different than
20 a non-conductive material, each array providing an electrical path through the mixture, wherein interaction of the molecule with the array provides a change in resistance in the mixture.

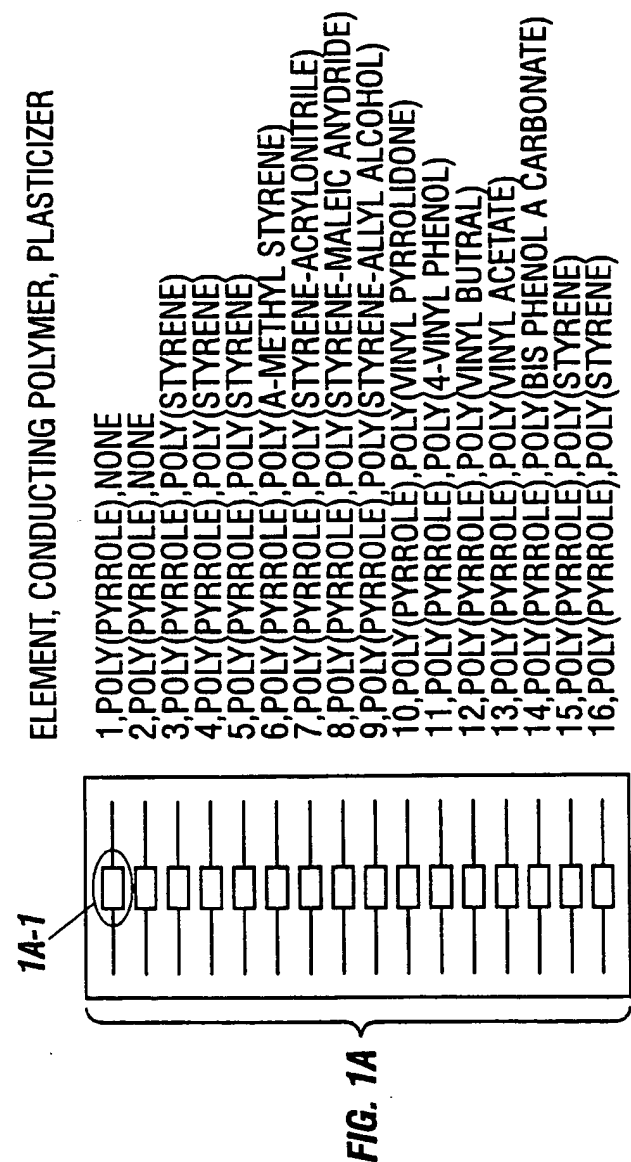
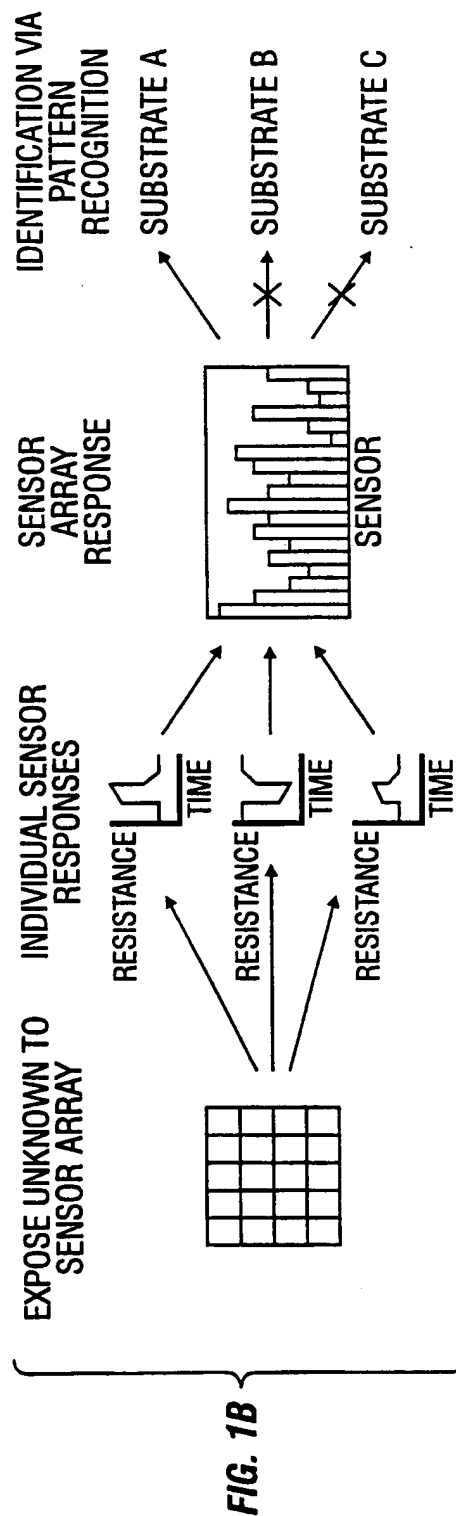
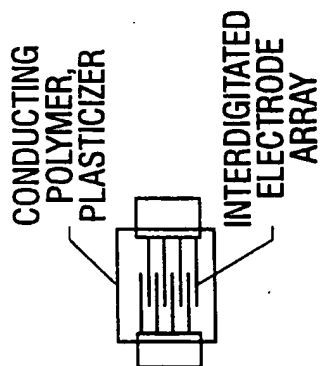


FIG. 1A-1



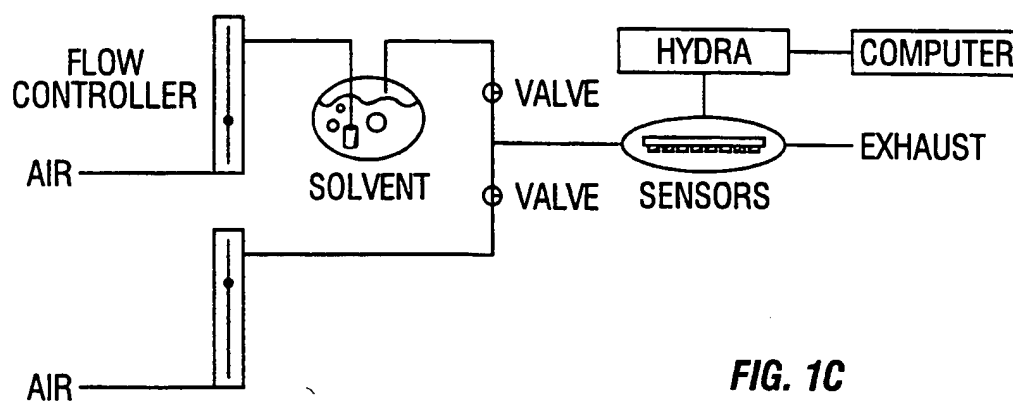


FIG. 1C

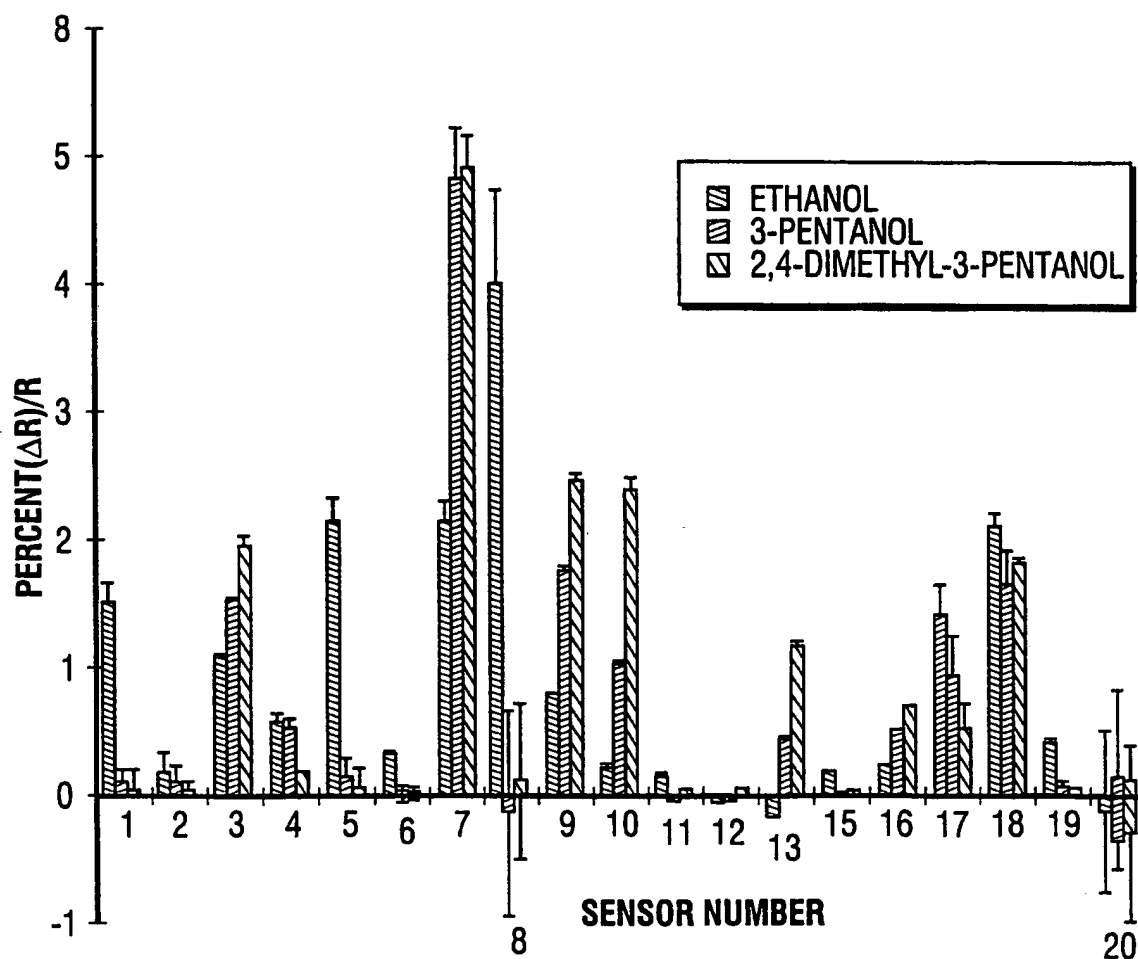


FIG. 2

PREDICTED VS. EXPERIMENTAL PL₆₀

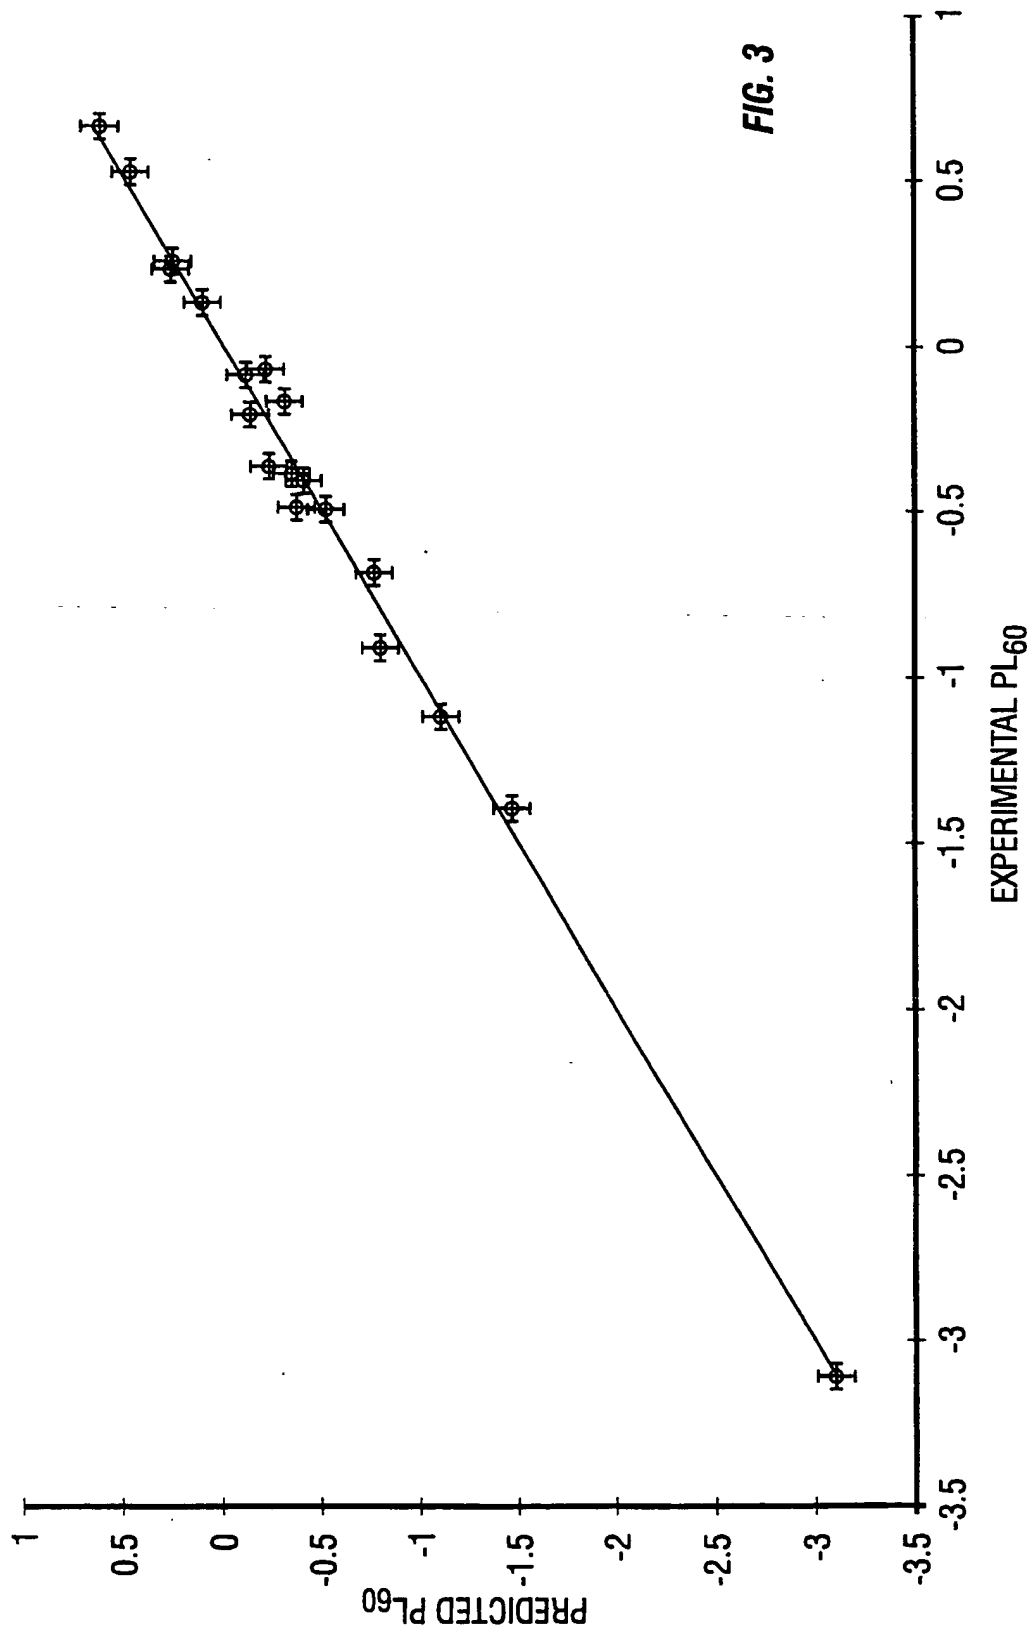
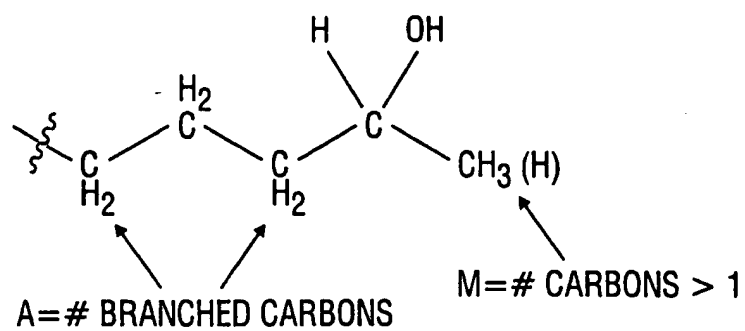


FIG. 3

**FIG. 4**

			polymer name	poly(4-vinylpyridine)
alcohol	experimental 1 pl50	run# (bubbler #)	sensor #:	1
1-butanol	-0.05	1 (8)		0.23 (0.08)
1-heptanol	0.68	2 (6)		0.05 (0.1)
1-hexanol	0.54	3 (6)		0.09 (0.08)
1-pentanol	0.27	3 (7)		0.17 (0.1)
1-propanol	-0.48	3 (3)		0.55 (0.14)
2,4-dimethyl-3-pentanol	-1.38	2 (1)		0.05 (0.14)
2-butanol	-0.35	2 (8)		0.2 (0.13)
2-heptanol	0.25	1 (2)		0.13 (0.08)
2-hexanol	0.15	2 (2)		0.16 (0.15)
2-methyl-1-butanol	-0.15	2 (7)		0.04 (0.11)
2-methyl-1-propanol	-0.39	1 (6)		0.12 (0.07)
2-methyl-3-pentanol	-0.89	1 (1)		0.13 (0.09)
2-pentanol	-0.07	3 (8)		0.06 (0.06)
2-propanol	-0.47	1 (7)		0.24 (0.08)
3-hexanol	-0.47	3 (1)		0.07 (0.08)
3-methyl-butanol	-0.19	3 (5)		0.08 (0.08)
3-pentanol	-0.37	2 (4)		0.11 (0.09)
ethanol	-1.1	2 (3)		1.52 (0.15)
menthanol	-3.09	1 (3)		3.71 (0.23)
neopentanol (solid)	-0.67	3 (2)		0.03 (0.1)
benzyl alcohol	0.32	1 (4)		0.06 (0.07)
tert-amyl alcohol	-2.56	1 (5)		0.1 (0.1)
1,3-propanediol	-1.87	3 (4)		-0.02 (0.1)
1,4-butanediol	-1.41	2 (5)		-0.01 (0.09)

FIG. 5A

<i>poly(vinyl chloride)</i>	<i>poly(ethylene oxide)</i>	<i>poly(styrene/allyl alcohol)</i>	<i>poly(4-vinylphenol)</i>	<i>poly(vinyl acetate)</i>	<i>ethyl cellulose</i>
2	3	4	5	6	7
0.01 (0.15)	1.83 (0.22)	0.56 (0.08)	0.41 (0.17)	0.11 (0.08)	4.04 (0.2)
0.04 (0.16)	1.9 (0.1)	0.23 (0.02)	0.08 (0.11)	-0.07 (0.05)	4.28 (0.21)
0.03 (0.16)	1.76 (0.04)	0.45 (0.05)	0.11 (0.09)	-0.08 (0.05)	5.32 (0.18)
-0.03 (0.13)	1.63 (0.02)	0.58 (0.05)	0.16 (0.1)	0.02 (0.04)	4.97 (0.14)
-0.03 (0.19)	1.18 (0.01)	0.57 (0.04)	0.7 (0.09)	0.2 (0.03)	3.17 (0.14)
-0.02 (0.13)	2 (0.06)	0.17 (0.02)	0.1 (0.11)	0 (0.03)	4.94 (0.25)
-0.06 (0.12)	1.35 (0.04)	0.65 (0.1)	0.29 (0.23)	0.14 (0.05)	3.89 (0.29)
-0.04 (0.09)	2.89 (0.54)	0.28 (0.04)	0.11 (0.13)	-0.09 (0.05)	4.76 (0.18)
0.01 (0.15)	1.69 (0.09)	0.37 (0.03)	0.17 (0.11)	-0.05 (0.03)	5.1 (0.31)
0.02 (0.12)	1.74 (0.05)	0.34 (0.04)	0.16 (0.14)	-0.01 (0.04)	4.76 (0.27)
0.01 (0.12)	1.84 (0.15)	0.48 (0.08)	0.28 (0.14)	0.1 (0.03)	3.98 (0.2)
0.06 (0.11)	2.34 (0.33)	0.29 (0.05)	0.19 (0.11)	-0.03 (0.04)	5.24 (0.26)
-0.03 (0.13)	1.41 (0.02)	0.57 (0.07)	0.14 (0.09)	0 (0.07)	4.9 (0.19)
0.13 (0.14)	1.58 (0.23)	0.57 (0.06)	0.62 (0.17)	0.14 (0.06)	3.31 (0.31)
0.01 (0.13)	1.57 (0.03)	0.4 (0.04)	0.07 (0.08)	-0.06 (0.05)	5.56 (0.23)
0.03 (0.08)	1.49 (0.02)	0.39 (0.03)	0.07 (0.07)	0.01 (0.04)	4.82 (0.13)
0.08 (0.15)	1.52 (0.04)	0.55 (0.06)	0.16 (0.13)	-0.01 (0.05)	4.83 (0.41)
0.19 (0.14)	1.08 (0.02)	0.59 (0.05)	2.19 (0.17)	0.31 (0.03)	2.19 (0.14)
0.57 (0.12)	1.33 (0.1)	0.55 (0.03)	2.51 (0.21)	0.4 (0.07)	1.82 (0.22)
0 (0.18)	1.37 (0.04)	0.14 (0.03)	-0.01 (0.05)	0.02 (0.03)	3.28 (0.2)
0.04 (0.13)	3.05 (0.91)	0.22 (0.03)	0.1 (0.07)	-0.03 (0.05)	2.07 (1.01)
-0.07 (0.14)	1.77 (0.24)	0.39 (0.07)	0.26 (0.14)	0.06 (0.05)	3.91 (0.29)
0.04 (0.12)	0.17 (0.02)	0.06 (0.02)	-0.01 (0.05)	0.01 (0.03)	0.4 (0.19)
-0.01 (0.15)	0.19 (0.2)	0.06 (0.06)	0.04 (0.06)	-0.02 (0.04)	0.81 (0.68)

FIG. 5B

<i>poly(N-vinylpyrrolidone)</i>	<i>poly(ethylene/acrylic acid)</i>	<i>poly(ethylene/vinyl acetate)</i>	<i>poly(methyl methacrylate)</i>	<i>poly(methylvinylether/maleic anhydride)</i>	<i>1,2polybutadiene</i>
8	9	10	11	12	13
0.31 (0.7)	1.65 (0.14)	0.74 (0.1)	0 (0.02)	-0.01 (0.01)	0.23 (0.1)
0.52 (0.84)	1.66 (0.09)	0.69 (0.04)	0.01 (0.03)	0 (0.01)	0.3 (0.02)
-0.07 (0.6)	1.84 (0.05)	0.73 (0.02)	0.01 (0.03)	-0.01 (0.02)	0.28 (0.01)
0.67 (0.58)	1.7 (0.03)	0.67 (0.01)	0.01 (0.02)	0 (0.02)	0.21 (0.01)
1.08 (0.82)	1.07 (0.02)	0.4 (0.02)	0.01 (0.03)	-0.02 (0.02)	-0.03 (0.01)
0.11 (0.61)	2.49 (0.05)	2.42 (0.09)	0.02 (0.02)	0.03 (0.02)	1.19 (0.04)
0.23 (0.68)	1.62 (0.03)	0.76 (0.04)	0 (0.03)	-0.02 (0.01)	0.26 (0.01)
0.23 (0.99)	1.91 (0.06)	0.99 (0.04)	0 (0.03)	0.01 (0.03)	0.45 (0.02)
0.77 (0.42)	1.97 (0.05)	0.92 (0.03)	-0.01 (0.02)	0.1 (0.02)	0.45 (0.01)
0.09 (0.73)	1.82 (0.04)	0.91 (0.03)	-0.01 (0.02)	-0.01 (0.01)	0.41 (0.01)
0.47 (0.59)	1.65 (0.1)	0.78 (0.08)	0 (0.02)	-0.04 (0.02)	0.28 (0.07)
0.76 (0.61)	2.17 (0.02)	1.59 (0.04)	0 (0.03)	0.08 (0.02)	0.75 (0.02)
0.68 (0.55)	1.77 (0.02)	0.82 (0.02)	-0.01 (0.02)	0 (0.01)	0.34 (0.01)
0.4 (0.88)	1.45 (0.07)	0.63 (0.04)	0 (0.02)	-0.04 (0.03)	0.16 (0.05)
0.02 (1.03)	1.81 (0.04)	1.07 (0.01)	0.01 (0.02)	0.01 (0.02)	0.51 (0.01)
0.08 (0.83)	1.77 (0.02)	0.75 (0.02)	-0.01 (0.04)	-0.04 (0.02)	0.36 (0.01)
-0.13 (0.81)	1.79 (0.03)	1.03 (0.04)	-0.01 (0.01)	-0.01 (0.02)	0.43 (0.01)
4.03 (0.74)	0.78 (0.03)	0.2 (0.04)	0.14 (0.03)	-0.03 (0.02)	-0.13 (0.03)
7.76 (0.78)	0.69 (0.03)	0.15 (0.04)	0.57 (0.03)	0.52 (0.05)	-0.01 (0.01)
-0.13 (0.79)	1.54 (0.05)	0.94 (0.03)	0 (0.03)	0 (0.02)	0.42 (0.01)
-0.1 (0.59)	0.58 (0.34)	0.33 (0.17)	-0.01 (0.02)	-0.04 (0.02)	0.11 (0.08)
0.35 (0.62)	2.05 (0.12)	1.04 (0.08)	0 (0.02)	-0.03 (0.02)	0.47 (0.06)
-0.39 (0.8)	0.06 (0.01)	0.02 (0.02)	-0.01 (0.04)	-0.03 (0.02)	0.02 (0.01)
-0.09 (0.79)	0.14 (0.15)	0.05 (0.05)	-0.01 (0.02)	-0.03 (0.02)	0.03 (0.02)

FIG. 5C

<i>poly(styrene/ acrylonitrile)</i>	<i>poly(methyloctadecy- lisoaxane)</i>	<i>poly(vinyl butyral)</i>	<i>poly(ethylene glycol)</i>	<i>poly(2,4,6- tribromostyrene)</i>	<i>polystyrene</i>
15	16	17	18	19	20
0 (0)	0.42 (0.02)	1.14 (0.27)	2.37 (0.25)	0.12 (0.06)	-0.46 (0.73)
0 (0)	0.41 (0.03)	0.45 (0.22)	1.23 (0.14)	0.01 (0.02)	-0.01 (0.82)
0 (0)	0.49 (0.02)	0.89 (0.14)	1.79 (0.08)	0.04 (0.03)	0.23 (0.94)
0.01 (0)	0.46 (0.02)	1.04 (0.18)	1.95 (0.06)	0.07 (0.06)	-0.21 (0.8)
0.02 (0)	0.28 (0.02)	1.15 (0.2)	2.12 (0.11)	0.25 (0.04)	0.47 (0.59)
0 (0.01)	0.72 (0.02)	0.54 (0.21)	1.85 (0.04)	0.01 (0.02)	-0.29 (0.69)
0 (0)	0.4 (0.02)	1.03 (0.23)	1.95 (0.09)	0.13 (0.02)	0.17 (0.32)
0 (0)	0.49 (0.03)	0.62 (0.19)	2.13 (0.49)	0.03 (0.01)	-0.03 (0.32)
0.01 (0)	0.51 (0.01)	0.77 (0.21)	1.73 (0.11)	0.03 (0.02)	0.08 (0.76)
0 (0.01)	0.45 (0.02)	0.77 (0.24)	2.08 (0.11)	0.03 (0.03)	0.15 (0.84)
0 (0)	0.41 (0.02)	1.01 (0.21)	2.41 (0.19)	0.09 (0.05)	0.2 (0.5)
0.01 (0)	0.59 (0.02)	0.7 (0.2)	2.34 (0.25)	0.03 (0.03)	-0.09 (0.84)
0 (0)	0.45 (0.02)	1.03 (0.28)	1.85 (0.07)	0.07 (0.05)	-0.12 (0.79)
0 (0)	0.36 (0.03)	1.15 (0.17)	2.34 (0.29)	0.14 (0.04)	-0.04 (0.47)
0 (0)	0.53 (0.02)	0.87 (0.2)	1.63 (0.1)	0.06 (0.08)	-0.12 (0.74)
0 (0)	0.42 (0.02)	0.9 (0.12)	1.85 (0.06)	0.03 (0.03)	-0.09 (0.73)
0 (0)	0.5 (0.03)	0.96 (0.31)	1.85 (0.1)	0.07 (0.04)	0.14 (0.71)
0.17 (0.01)	0.23 (0.02)	1.44 (0.25)	2.14 (0.1)	0.42 (0.04)	-0.11 (0.63)
0.62 (0.03)	0.21 (0.02)	1.58 (0.25)	2.78 (0.2)	0.27 (0.03)	0.11 (0.7)
0 (0)	.034 (0.02)	0.39 (0.2)	1.75 (0.07)	0.01 (0.03)	-0.21 (0.56)
0 (0)	0.17 (0.11)	0.34 (0.26)	1.36 (0.48)	0.01 (0.04)	-0.5 (0.76)
0 (0)	0.46 (0.01)	0.74 (0.16)	2.26 (0.23)	0.08 (0.03)	0.09 (0.48)
0 (0)	0.01 (0.02)	0.09 (0.18)	0.09 (0.09)	0 (0.13)	0.04 (0.78)
0 (0.01)	0.04 (0.04)	0 (0.14)	0.13 (0.13)	0.01 (0.03)	-0.32 (0.87)

FIG. 5D

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/08263

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G01N 27/00, 27/02, 27/26; B32B 5/22

US CL : 204/403, 406; 422/50, 68.1, 76, 81.01, 81.02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 204/403, 406; 422/50, 68.1, 76, 81.01, 81.02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, STN (CAPlus, BIOSIS, EMBASE, Medline, SciSearch)

Search terms: electronic nose, sensor, array, differential, analyte, library, neural net/network, DNA, RNA, nucleic acid

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DICKINSON et al. Generating Sensor Diversity through Combinatorial Polymer Synthesis. Analytical Chemistry. 01 September 1997, Vol. 69, pages 3413-3418. See entire document.	1-2
X	US 5,466,348 A (HOLM-KENNEDY) 14 November 1995 (14/10/95), see Abstract, column 4 lines 53-68, column 5 lines 6-25	1-3, 9-15 and 21-23
-		---
Y	and 41-51, column 6 lines 10-16, column 16 lines 51-67, column 17 lines 1-17 and 46-65 & column 18 lines 1-22.	24-25

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 JULY 1999

Date of mailing of the international search report

28 JUL 1999

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MAURIE E. GARCIA

Telephone No. (703) 308-0196

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/08263

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	LUINGE et al. Trace-level Identity Conformation from Infrared Spectra by Library Searching and Artificial Neural Networks. Analytica Chimica Acta. 20 June 1997, Vol. 345, pages 173-184, see entire article.	24-25
X	US 5,653,939 A (HOLLIS et al) 05 August 1997 (05/08/97), see Abstract, column 2 lines 31-38 and 59-67 & column 6-8 Section III.	1-3 and 9-12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/08263

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-3, 9-15, 21-25

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/08263

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claim(s) 1-25, drawn to a method for screening molecules.
Group II, claim(s) 26-40, drawn to a molecule screening system.

This application contains claims directed to more than one species of the generic invention. These species are deemed to lack Unity of Invention because they are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for more than one species to be searched, the appropriate additional search fees must be paid. The species are as follows:

Group I

Molecule of interest:
Species A - nucleic acid
Species B - polypeptide - Must select from B1-B3 below
 Species B1 - antibody
 Species B2 - enzyme
 Species B3 - protein
Species C - biochemical
Species D - chemical

Group II

Sample:
Species A - nucleic acid
Species B - polypeptide - Must select from B1-B3 below
 Species B1 - antibody
 Species B2 - enzyme
 Species B3 - protein
Species C - biochemical
Species D - chemical

The claims are deemed to correspond to the species listed above in the following manner:

Group I

Molecule of interest:
Species A - nucleic acid - Claims 1-3,9-15,21-25
Species B - polypeptide - Must select from B1-B3 below
 Species B1 - antibody - Claims 1,2,4,7,9-14,16,19,21-25
 Species B2 - enzyme - Claims 1,2,4,8-14,16,20-25
 Species B3 - protein - Claims 1,2,4,9-14,16,21-25
Species C - biochemical - Claims 1,2,5,9-14,17,21-25
Species D - chemical - Claims 1,2,6,9-14,18,21-25

Group II

Sample:
Species A - nucleic acid - Claims 26-28,34-40
Species B - polypeptide - Must select from B1-B3 below
 Species B1 - antibody - Claims 26,27,29,32,34-40
 Species B2 - enzyme - Claims 26,27,29,33,34-40
 Species B3 - protein - Claims 26,27,29,34-40
Species C - biochemical - Claims 26,27,30,34-40
Species D - chemical - Claims 26,27,31,34-40

The following claims are generic: Group I: Claims 1,2,9-14,21-25; Group II: Claims 26,27,34-40.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/08263

The inventions listed as Groups I and II do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: The technical feature that links these groups of claims is known in the art. This feature is a sensor array comprising a plurality of differentially responsive sensors. Such arrays are known, for example, in DICKINSON et al. Generating Sensor Diversity through Combinatorial Polymer Synthesis. Anal. Chem. 09 September 1997, Vol. 69, pages 3413-3418 or US 5,653,939 A(HOLLIS et al) 08 August 1997. Both references teach uniquely responding sensors, measuring signal output from each sensor, obtaining a signal profile and comparing the results (see Figures 1, 3 and 5 in DICKINSON et al and columns 6-8 of HOLLIS et al).

The species listed above do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, the species lack the same or corresponding special technical features for the following reasons: Since the concept of sensor arrays comprising differentially responsive sensors is known (as shown above) the species would also lack unity. Additionally, sensors measuring several of the claimed species are known in the art. The references above teach two of the species; in DICKINSON et al vapors of organic chemicals are analyzed while in HOLLIS et al DNA is analyzed.